



---

**Wuxi Baile Sheet Metal Co., Ltd**

Address: No.81, B Area Jinshan North Industry Park, Wuxi, Jiangsu, China

Email: [wuxisteel@yahoo.com](mailto:wuxisteel@yahoo.com)

Tel: 86-510-83077037

Fax: 86-510-83077030

Mobil: +86 158 9532 8516

MSN: [hankswang@live.com](mailto:hankswang@live.com)

Skype: [hanks\\_wang](https://www.skype.com/people/hanks_wang)

Yahoo messenger: [wuxisteel@yahoo.com](mailto:wuxisteel@yahoo.com)

Home page: <http://www.cnblsteel.com>

---

**CRC**

**HDGI**

**PPGI**

**GL**

**PPGL**

**From one source--Baile Group**



### **Cold-rolled steel strip/coil**

Max. Width (mill edge):1250mm

Min. Width (slit edge): 35mm

Max. Thickness: 2.0mm

Min. Thickness: 0.3mm

Inside diameter: 508mm

Outside diameter: 850~1500mm

Anneal surface shape: brightness and black finish

Description of goods:soft, half hard, full hard

Main Steel Grade: Q195, Q215, Q235, SPCC,

08AL, DC01, ST12, ST37SAE1006, SAE1008 etc

Packing Details:sea worth packing



### **Hot dipped galvanized steel strip/coil**

Steel Grade: Q195, Q215, Q235, Q345, SGCC,

DXD51, DXD52, EN 10147 S350GD, JIS G3302

SGC 490, ASTM A36, ASTM A653, Grade 50 etc.

Width:30mm to 630mm,

Thickness:0.30mm to 2.8mm.

Zinc coating:Max 275g/m<sup>2</sup>, double sides)

Surface condition:Regular spangle

Coil ID: 508mm

Coil OD: 1000~1500mm

Packing Details:sea worth packing



### **GL- Hot-dipped Galvalume steel**

Material- SPCC

Demission

- thickness 0.3mm~2.0mm

- width 1250mm Max.


- I.D 508mm

Coating- 150g/m<sup>2</sup> Max.

Status- anti-finger,oiled/nonoil

Thic. tolerance-+/-0.02mm

Package- sea worth packing

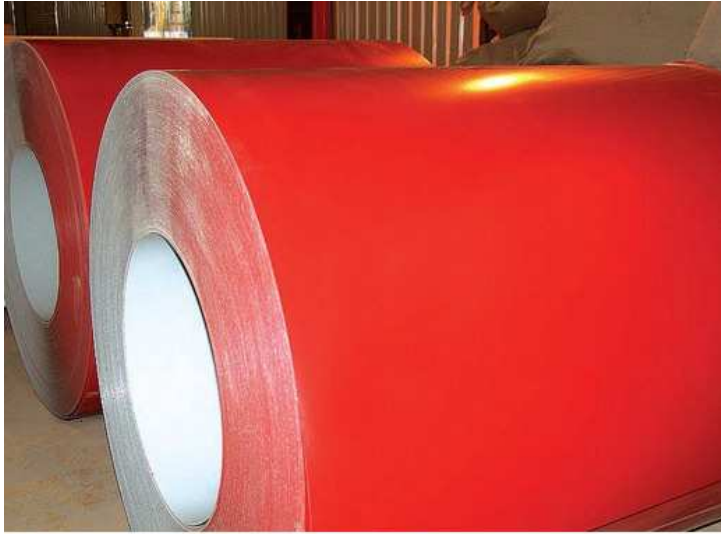

### **Prepainted coil (PPGI coils), GI base**

Standard: JIS G3312/94 CGCC, commercial quality

Thickness range: 0.30mm to 1.0mm

Tolerance of thickness: +/-0.03mm

Width range: 900mm to 1250mm

Tolerance of width: +/-5.00mm

Coil weight: 4 - 8MT

Coil ID: 508mm

Packing: Seaworthy, in container

Top surface: 15-20 micron polyester+5 mic primer

Back surface: 5 - 7 micron

Color: Normal color, such as RAL9002, RAL5020



### **Prepainted coil (PPGL coils), GL base**

Standard: JIS G3312/94 CGCC, commercial quality

Thickness range: 0.30mm to 1.0mm

Tolerance of thickness: +/-0.03mm

Width range: 900mm to 1250mm

Tolerance of width: +/-5.00mm

Coil weight: 4 - 8MT

Coil ID: 508mm

Packing: Seaworthy, in container

Top surface: 15-20 micron polyester+5 mic primer

Back surface: 5 - 7 micron

Color: Normal color, such as RAL9002, RAL5020



### **Black annealed cold-rolled steel strip**

Max. Width (mill edge): 1250mm

Min. Width (slit edge): 35mm

Max. Thickness: 3.0mm

Min. Thickness: 0.5mm

Inside diameter: 508mm

Outside diameter: 850~1500mm

Anneal surface shape: brightness and black finish

Description of goods: soft, half hard, full hard

Main Steel Grade: Q195, Q215, Q235, SPCC,

08AL, DC01, ST12, ST37SAE1006, SAE1008 etc

Packing Details: sea worth packing